



CURRENT PROBE

The F-72 has a usable frequency range of 100 Hz – 100 MHz. Primary power currents of 350 amperes DC – 400 Hz and 100 amperes pulse will not alter the transfer impedance.

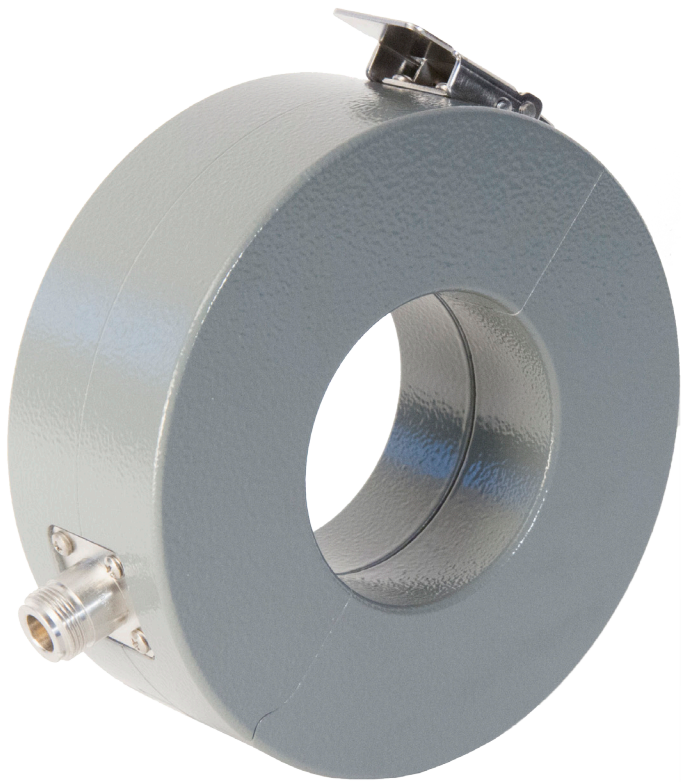

[点击查看中文参数](#)

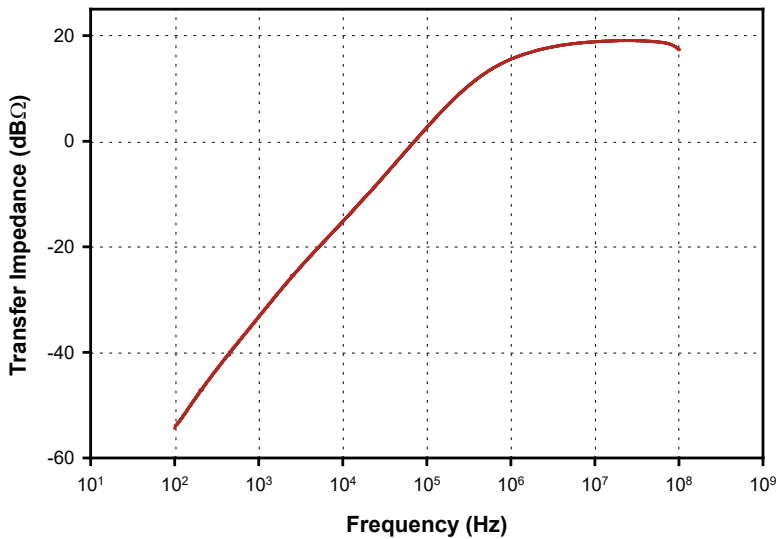

Specifications

Frequency:	100 Hz – 100 MHz
Internal diameter:	67 mm
External diameter:	142 mm
Height:	53 mm
ZtΩ ¹ :	8
dBΩ ¹ :	18
Connector:	Type-N
DC to 400 MHz:	350 amperes
RF(CW):	10 amperes
Peak Pulse Current ² :	100 amperes

1: Probe calibrated with 50 Ω + j0Ω Load Impedance.
2: Depends upon the pulse width and pulse rep. rate.



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503
Phone: 310-303-3300
Fax: 310-371-6268
Email: sales@fischercc.com